DRL1600R

DDR3-1600, PC3-12800, Registered, ECC, 1.5V, 240-pin DIMMs

Products in Family

DRL1600R8/4GB (1 x 4GB 2Rx8 DIMM)
DRL1600R/8GB (1 x 8GB 2Rx4 DIMM)
DRL1600R/16GB (1 x 16GB 2Rx4 DIMM)

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181” x 5.25”) Data Transfer Rate: 12.8 Gigabytes/sec Operating Voltage: 1.5 V ±0.075 Fully RoHS Compliant Thermal Sensor	Each DRL1600R upgrade consists of a single DDR3-1600 Registered ECC DIMM that conforms to JEDEC’s DDR3, PC3-12800 standard. One 2K-bit EEPROM is used for Serial Presence Detect and a combination register/PLL with Address and Command Parity is also used. A thermal sensor accurately monitors the DIMM module and can prevent exceeding the maximum operating temperature of 95C.

Dataram Product	Dell Product	Supported in these Dell systems:
DRL1600R8/4GB	A5816827, A5681562, A5681560	Dell PowerEdge R620, R715, R720, R720xd, R815, R820, M620, T620, C6220
DRL1600R/8GB	A5816812, A5681561, A5681559	
DRL1600R/16GB	TBD	

Front view

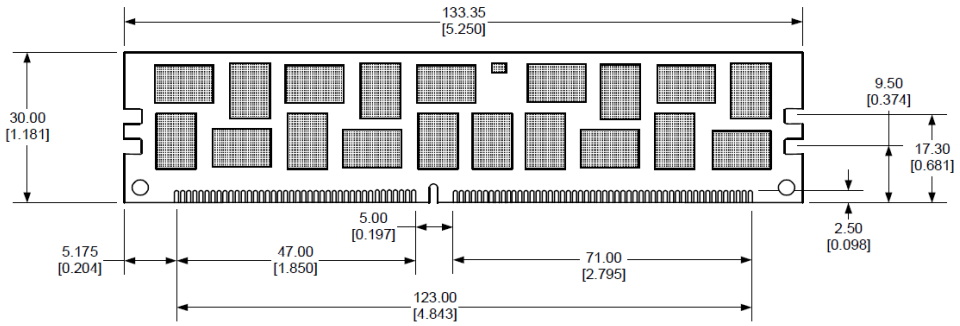

Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

Back view

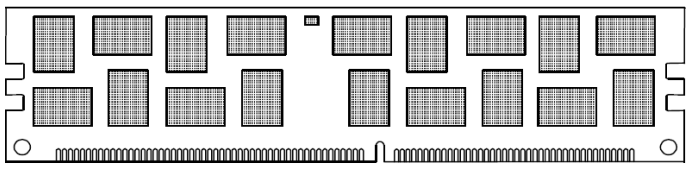

Side view



Copyright © 2012 Dataram Corporation | U.S.A. Headquarters +1 609-799-0071 | Offices in Europe and Asia | www.dataram.com

The information contained in this document has been carefully checked and is believed to be reliable and accurate. However, Dataram assumes no responsibility for errors.